




AFG-3000 Series

Arbitrary Function Generator

FEATURES

- 1 μ Hz ~ 20 or 30MHz, 20Vpp, 1 or 2 Channel (s)
- Arbitrary Waveform 250MSa/s, 16-bit Resolution, 8M Memory Depth
- Isolation Channel Circuit Design
- Synchronized Phase Operates up to 6 Units and 12 Channels
- Harmonic Signal Generator
- Dual Channel Models Support SUM Modulation, Coupling, Tracking, and Phase Functions
- Pulse Waveform Parameters Can be Set Independently
- Built-in AM/FM/PM/FSK/PWM/SUM Modulation, Sweep and Burst Functions
- Built-in Medical and Automotive Electronic Waveforms
- Built-in I/Q baseband Waveform on AFG-3032/3022
- Provide USB/LAN/GPIB (Optional) Instrument Control Interface

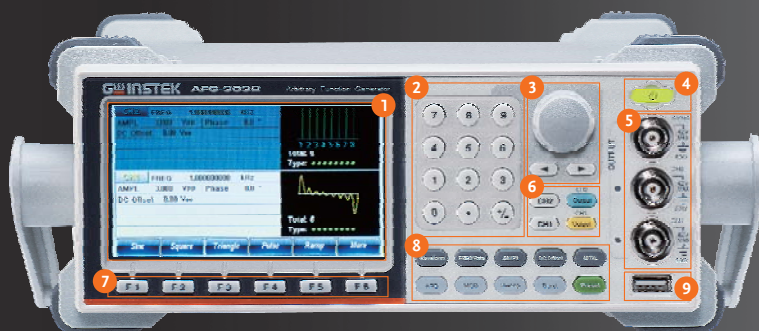


AFG-3032/3022

1. TFT LCD Panel
2. Number Panel
3. Scroll Knob & Selection Key
4. Power Switch
5. Output Terminals
6. Main Output Switch
7. Function Keys
8. Operation Keys
9. USB Host
10. Trigger & Modulation Input
11. 10MHz REF Input & Output
12. Fan
13. GPIB
14. LAN
15. USB Device



AFG-3031/3021

1. TFT LCD Panel
2. Number Panel
3. Scroll Knob & Selection Key
4. Power Switch
5. Output Terminals
6. Main Output Switch
7. Function Keys
8. Operation Keys
9. USB Host
10. Trigger & Modulation Input
11. 10MHz REF Input & Output
12. Fan
13. GPIB
14. LAN
15. USB Device

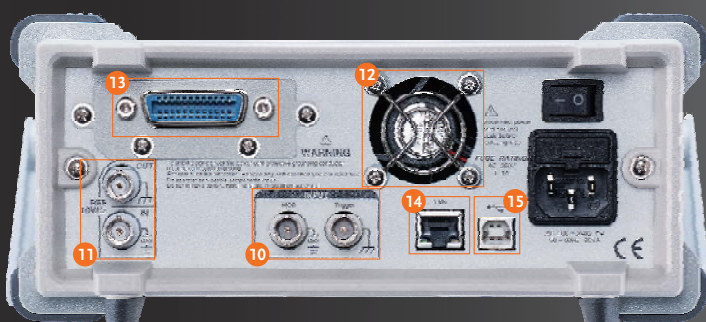

The AFG-3000 Series Comes With Four Models. Model Number and Channel (s) are Listed as Follows:

MODEL	AFG-3031	AFG-3032	AFG-3021	AFG-3022
MAIN FUNCTION				
Frequency Range	1 μ Hz ~ 30 MHz	1 μ Hz ~ 30 MHz	1 μ Hz ~ 20 MHz	1 μ Hz ~ 20 MHz
Channel	1	2	1	2

GW Instek AFG-3000 Series arbitrary function generators include 20MHz/30MHz single isolated channel and 20MHz/30MHz dual isolated channel models, designed to meet industry, scientific research, and education applications. Not only output channel is earth ground isolation, dual channel models are also independently earth ground isolation, which is suitable for floating circuits (up to $\pm 42\text{V}$). Without taking grounding reference into consideration, each channel of dual channel models can be operated independently and multi ARB units can output simultaneously. Applications are, for instance, the ignition control or transmission device of automotive electronics. The series features sample rate of 250MSa/s, 16-bit resolution, and 8M point memory depth arbitrary waveform characteristics. Users can rebuild maximum 8M memory depth waveforms through using a GW Instek digital storage oscilloscope with the built-in DSOLink function of the AFG-3000 Series.

The series supports synchronized phase for multi channel operation and the maximum phase synchronization operation is up to 6 units and 12 channels. 10 MHz atomic clock frequency standard can be input via external signal source to elevate precision for frequency output. The series supports frequency sweep and amplitude sweep that can also integrate functions, including linear/logarithm, one-way (saw tooth)/two-way (triangle) waveforms, continuous/single trigger/gated trigger to meet various application requirements by applying different sweep methods. Frequency sweep tests the frequency response of electronic components such as filter and low frequency amplifier. Amplitude sweep simulates vibration tests (requires a vibration tester), and it also conducts aging tests of various materials and linearity tests of low frequency amplifier.

The main features of the AFG-3000 Series include output amplitude from 1mVpp to 10Vpp (connected with a 50 ohm load); frequency range from 1uHz to 20MHz or 30MHz; 1uHz frequency resolution; and built-in sine, square, pulse, triangle, ramp, DC voltage, harmonic and noise. The waveform width, rise edge time and fall edge time of pulse waveform can be adjusted flexibly. Pulse waveform, with duty cycle from 0.017% to 99.983%, can be applied as trigger signals. Users can conduct arbitrary editing via 65 built-in function waveforms. The series supports AM/FM/PM/FSK/PWM modulation, frequency sweep, amplitude sweep and burst to satisfy industrial application requirements. Dual channel models provide SUM modulation, coupling, tracking, and phase to meet the test requirements of differential signal, phase control and amplifier distortion. Built-in 8th harmonic signal generator simulates harmonic signal of switching power supplies and it also tests EMI power filter characteristics. The AFG-3000 Series provides free arbitrary waveform editing software (AWES) for users to quickly edit waveforms from the built-in diagrams so as to execute measurements.

A.


CIRCUIT DESIGN FOR GROUND ISOLATION AMONG OUTPUT/INPUT TERMINAL, INSTRUMENT CHASSIS, AND DUAL CHANNELS



Channel 1, channel 2, reference 10 MHz input, synchronization and modulation input/output connector grounding are isolated from instrument chassis. The output channels of dual channel models are independently isolated. These connectors can sustain maximum isolation voltage up to $\pm 42\text{Vpk}$ (DC+ AC peak value) to earth ground that is ideal for floating circuit tests. Multi units output can be achieved without factoring in grounding reference issue. Applications include ignition controller or transmission devices of automotive electronics. The built-in DC bias voltage of the AFG-3000 Series can be applied on various waveforms. The DC bias voltage is $\pm 5\text{V}$ under 50 Ω load. For automotive electronic applications require higher DC bias voltage such as ignition controller or transmission devices, the external power supplies can be used to bring up the DC bias voltage to $\pm 42\text{Vpk}$ (DC+ AC peak value).


B.

MULTI CHANNEL SYNCHRONIZED PHASE OPERATION

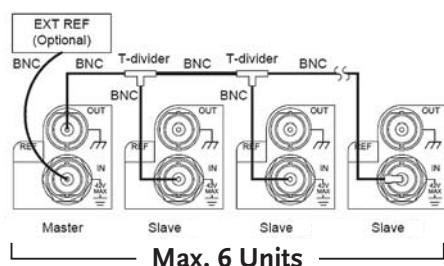

Method one uses reference frequency output (REF OUT) and reference frequency input (REF IN), 50 ohm BNC cable (RG-58A/U) and T type BNC connector to connect up to 6 units to conduct synchronized phase operation.

Users can implement multi channel synchronized phase operation up to 6 units and 12 channels (AFG-3032/3022). There are two methods to execute synchronized phase applications. Under different frequency, master unit can synchronize each channel and modulate individual phase.

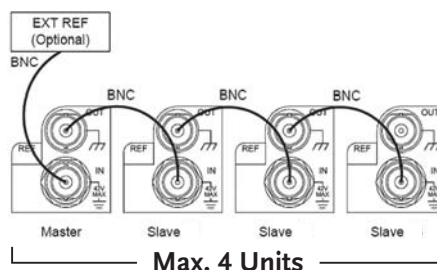


Method two uses reference frequency output (REF OUT) and reference frequency input (REF IN), 50 ohm BNC cable (RG-58A/U) to connect up to 4 units to conduct synchronized phase operation.

At 10 MHz reference frequency input (REF IN) connector, users can input 10 MHz atomic clock frequency standard via external signal source to enhance precision for frequency output.

C. HARMONIC SIGNAL GENERATOR



Harmonic Signal Generator




Harmonic Signal

Harmonic signal generator simulates the harmonic signal of switching power supplies and conducts characteristics tests on EMI power filter. Users can set order number and phase for harmonic signals to obtain desired signals. The following diagrams show 8th harmonic signal.

D. PULSE GENERATOR




Pulse Generator




Pulse Signal

The output frequency for pulse reaches 25 MHz and its duty cycle is from 0.017% to 99.983%. Users can set pulse width, duty cycle, rise edge time, fall edge time and edge time to support trigger signal. The following diagrams show settings for pulse signal.


E. VERSATILE OUTPUT WAVEFORM SELECTIONS




Sine




Square



Triangle




Harmonic



Ramp



Pulse




Noise




DC Voltage


MEDICAL APPLICATION WAVEFORMS



ECG1



ECG2




ECG3




Cardiac.


AUTOMOTIVE ELECTRONIC WAVEFORMS




Ignition



ISO7637-2 TP3A



ISO7637-2 TP3B

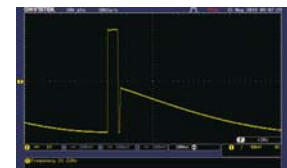


ISO7637-2 TP2B

101 built-in function waveforms include engineering applications, medical electronics, automotive electronic waveforms mathematics, and standard waveforms such as sine, square,

triangle, ramp, pulse, noise, harmonic, and DC voltage that allow users to easily select desired waveforms. Users can select and edit 101 function waveforms from the arbitrary function.


F. IQ BASEBAND WAVEFORM OUTPUT FUNCTION FOR AFG-3032/3022

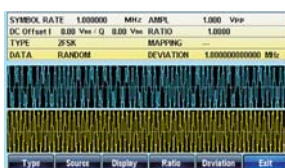


FSK



MSK



PSK




QAM


The CH1 and CH2 of AFG-3032/22 provide the IQ baseband waveform outputs, which include ASK, MSK, FSK(2FSK, 4FSK, 8FSK), PSK(BPSK,QPSK,DQPSK,QQPSK,pi/4 QPSK,pi/4DQPSK,

8PSK), APSK(16APSK, 32APSK), QAM(16QAM, 32QAM, 64QAM), etc. New IQ waveform commands are also available in the user manual.


G. MODULATION FUNCTION




Amplitude Modulation




Frequency Modulation




Phase Modulation



Frequency-shift Keying Modulation



Pulse Width Modulation



Sum Modulation


The series supports AM, FM, PM, FSK, PWM and SUM modulation. Modulation source can be from inside or outside.

Applications include the baseband of communications systems, motor control and light adjustment, etc.

H. SWEEP FUNCTION




Amplitude Sweep Setting



Amplitude Sweep Signal



Frequency Sweep Setting



Frequency Sweep Signal


The series supports frequency sweep and amplitude sweep that can also integrate functions, including linear/logarithm, one-way (saw tooth)/two-way (triangle) waveforms, continuous/single trigger/gated trigger to meet various application requirements by different sweep methods. Frequency sweep carries out tests

on the frequency response of electronic components such as filter and low frequency amplifier. Amplitude sweep simulates vibration tests (requires a vibration tester), and it also conducts aging tests of various materials and linearity tests of low frequency amplifier.

I. BURST FUNCTION



Burst Setting

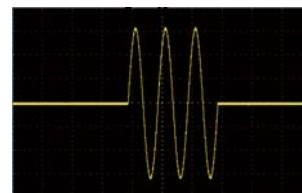


Burst Signal

The series supports N-period or gated trigger. Phase angle, duration time, frequency, waveform infinite can be adjusted to meet non-continuous output applications.

J. FLEXIBLE ARBITRARY WAVEFORM EDITING

Four methods to obtain arbitrary waveforms

• Front Panel Operation

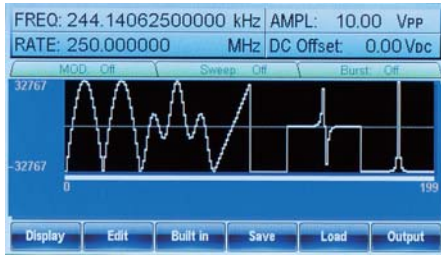

Via single unit's panel, arbitrary waveforms can be selected, edited, stored, recalled, output, triggered from 65 built-in waveforms.

• Direct Waveform Reconstruction (DWR)



Direct Waveform Reconstruction from the DSO

Collocate with GDS series digital oscilloscopes to retrieve waveforms and upload them to arbitrary generator to achieve direct waveform reconstruction.

• CSV file Upload

	A	B	C
1	Start:	0	
2	Length:	629	
3	Sample Rate:	20000000	
4		0	
5		328	
6		655	
7		983	
8		1310	


```
% sine wave generation program
result=round(2*15*sin(0.01:2*pi));
save gensin.csv result /ascii;
% end

Start: 0
Length: 629
Sample Rate: 20000000
0
328
655
983
1310
1638
```

Supports CSV file

Support CSV file upload produced by MATLAB and Excel.

• Arbitrary Waveform Editing PC Software




A Sinc Waveform with Gaussian Noise




Digital Signal

Use AWES to edit complex waveforms. The software supports waveform mathematical operation. The waveform series includes Uniform Noise, Gaussian Noise, Rayleigh Noise, various digital codes such as non zero code, Manchester and RS-232, etc.


K. CORRELATED FUNCTIONS OF DUAL CHANNEL OUTPUTS



Differential Signal



Sine and Cosine Signal



Square Signal Phase Adjustment

AFG-3032/3022 models support independent channel or correlated channel applications. Four correlated functions are provided including SUM modulation, coupling, tracking, and phase.

- * SUM modulation combines two signals and outputs the signal via one single channel. Combining noise and sine waveform to execute speaker's distortion test is one of the applications.
- * Coupling function arbitrarily sets ratio and difference for frequency and amplitude between two channels to realize a simultaneous effect for all parameters of dual channel. The example is amplifier using third order interpolation point(IP3) measurement to simulate signal output of two different frequency oscillators.
- * Tracking function produces differential signal with same frequency, same amplitude, and 180 degree phase difference.
- * Phase function arbitrarily sets phase parameters between two channels such as simulating sine/ cosine/square signal phase adjustment.

SPECIFICATIONS

		AFG-3031	AFG-3032	AFG-3021	AFG-3022
CHANNELS		1	2	1	2
FEATURES	I/O Signal Ground for the Instrument Chassis	Connector shells for channel output(s), Sync output, 10MHz REF Input, Mod Input and Mod output are isolated from the instrument's chassis. Maximum allowable voltage on isolated connector shells is ±42 Vpk. (DC + AC Peak)			
	Each of the Signal Ground of CH1/CH2	—	Isolated	—	Isolated
	Standard Waveforms	Sine, Square, Triangle, Ramp, Pulse, Noise, Harmonic			
ARBITRARY WAVEFORMS	Sample Rate	250 MSa/s			
	Repetition Rate	125MHz			
	Waveform Length	8M points			
	Amplitude Resolution	16 bits			
	Non-Volatile Memory	Ten 8M waveforms (1)			
	User define Output Section	Any section from 2 ~ 8M points			
	Trigger	External			
	Built-in Arbitrary Waveforms	Sine, Square, Ramp, Sinc,Pulse, DC, Sin(x)/x, Exponential Rise, Exponential Fall, Negative Ramp, Absatan, Havercosine, Sinever, Abssin, Haversine, Stair_down, Abssinehalf, N_pulse, Stair_UD, Ampalt, Negramp, Stair_up, Attalt, Rectpuls1, Stepresp, Diric_even, Roundhalf, Trapezia, Diric_odd, Sawtoot, Tripuls1, Gauspuls1, Sinetra, Dlorentz, In, Sqrt, Exporise, Lorentz, Xsquare, Expofall, Gauss, Since, Arccos, Arctan, Sech, Arccot, Arctanh, Sinh, Arcsc, Cosh, Tan, Arcsec, Cot, Tanh, Arcsin, Csc, Arcsinh, Sec, Barthannwin, Chebwin, Kaiser, Bartlett, Flattopwin, Triang, Blackman, Hamming, Tukeywin, Bohmanwin, Hann			
FREQUENCY CHARACTERISTICS	Sine / Square Pulse	1μHz ~ 30MHz 1μHz ~ 25MHz	1μHz ~ 30MHz 1μHz ~ 25MHz	1μHz ~ 20MHz 1μHz ~ 20MHz	1μHz ~ 20MHz 1μHz ~ 20MHz
	Triangle / Ramp	1μHz ~ 1MHz			
	Resolution	1μHz			
	Accuracy	±1 ppm 0 ~ 50℃ ; ±0.3 ppm 18 ~ 28℃ ±1 ppm, per 1 year ≤ 1 μHz			
OUTPUT CHARACTERISTICS (2)	Amplitude	Range Accuracy Resolution Flatness Units			
	Offset	Range Accuracy			
	Waveform Output	Impedance			
	SYNC Output	Protection Level			
		Impedance			
SINE WAVE CHARACTERISTICS	Harmonic Distortion(5)	-60 dBc DC ~ 1 MHz, Ampl<3 Vpp; -55 dBc DC ~ 1 MHz Ampl>3 Vpp -45 dBc 1MHz ~ 5 MHz, Ampl>3 Vpp; -30 dBc 5MHz ~ 30 MHz, Ampl>3 Vpp <0.2%+0.1mVrms; DC ~ 20 kHz			
	Total Harmonic Distortion Spurious (non-harmonic)(5)	-60 dBc DC~1 MHz; -50 dBc 1MHz~20MHz; -50 dBc+ 6 dBc/octave 1MHz~30MHz(AFG-3031/3032)			
	Phase Noise	<-110dBc/Hz typical, 15 kHz offset, fc = 10MHz			
SQUARE WAVE CHARACTERISTICS	Rise/Fall Time	<8 ns (3)			
	Overshoot	< 5%			
	Asymmetry	1% of period+1 ns			
	Variable Duty Cycle	20.0%~80.0%, ≤ 25 MHz; 40.0%~60.0% , 25~30MHz		20.0%~80.0% , ≤ 20 MHz	
	Jitter	0.01%+525ps<2 MHz; 0.1%+75ps>2 MHz			
RAMP CHARACTERISTICS	Linearity	< 0.1% of peak output			
	Variable Symmetry	0% ~ 100% (0.1% resolution)			
PULSE CHARACTERISTICS	Pulse Width	20ns ~ 999,830s; Period ≥ Width-0.625 [(Rise Time-0.6ns)+(Fall Time-0.6ns)]			
	Duty Setting Range	0.017% ~ 99.983%			
	Period	40ns ~ 1,000,000s			
	Rise Time and Fall Time	9.32 ns ~ 799,900s (0.01ns or 3 digit resolution)			
	Resolution	0.0001%			
	Overshoot	<5%			
	Jitter	100 ppm + 50 ps			
HARMONIC	Harmonic Order	≤ 8			
	Harmonic Type	Even, Odd, All, User ; Amplitude and Phase can be set for all harmonics			
AM	Carrier Waveforms	Sine, Square, Triangle, Ramp, Pulse, Arb			
	Modulating Waveforms	Sine, Square, Triangle, Up/Dn Ramp			
	Modulating Frequency	2 mHz ~ 20 kHz			
FM	Depth	0% ~ 120.0%			
	Source	Internal / External			
	Carrier Waveforms	Sine, Square, Triangle, Ramp			
	Modulating Waveforms	Sine, Square, Triangle, Up/Dn Ramp			
PM	Modulating Frequency	2 mHz ~ 20 kHz			
	Peak Deviation	DC ~ 30 MHz (1μHz resolution)		DC~20 MHz (1μHz resolution)	
	Source	Internal / External			
	Carrier Waveforms	Sine, Triangle, Ramp			
PWM	Modulating Waveforms	Sine, Square, Triangle, Up/Dn Ramp			
	Modulating Frequency	2 mHz ~ 20 kHz			
	Deviation	0% ~ 100.0% of pulse width, 0.1% resolution			
	Source	Internal / External			
ADDITIVE MODULATION (SUM)	Carrier Waveforms	Sine, Triangle, Ramp, Pulse, Noise			
	Modulating Waveforms	Sine, Square, Triangle, Up/Dn Ramp			
	Ratio	0% ~ 100% of carrier amplitude, 0.01% resolution			
	Modulating Frequency	2 mHz ~ 20 kHz			
FSK	Source	Internal / External			
	Carrier Waveforms	Sine, Square, Triangle, Ramp			
	Modulating Waveforms	50% duty cycle square			
	Internal Rate	2 mHz ~ 1 MHz			
	Frequency Range	DC ~ 30 MHz		DC ~ 20 MHz	
	Source	Internal / External			

SPECIFICATIONS				
		AFG-3031	AFG-3032	AFG-3021 AFG-3022
SWEEP	Waveforms	Frequency Sweep : Sine, Square, Triangle, Ramp; Amplitude Sweep : Sine, Square, Triangle, Ramp, Pulse, Noise, ARB		
	Type Functions Direction Start F / Stop FREQ Sweep Time Trigger Mode Trigger Source	Frequency, Amplitude Linear or Logarithmic Up or Down Any frequency within the waveform's range 1 ms ~ 500 s (1 ms resolution) Single, External, Internal Internal / External		
BURST	Waveforms	Sine, Square, Triangle, Ramp, Pulse, Noise		
	Frequency Burst Count Start / Stop Phase Internal Period Gate Source Trigger Source Trigger Delay	1 μ Hz ~ 30 MHz (4)	1 μ Hz ~ 30 MHz (4)	1 μ Hz ~ 20 MHz 1 μ Hz ~ 20 MHz
EXTERNAL MODULATION INPUT	Type Voltage Range Input Impedance Frequency Modulation Output	1 ~ 1,000,000 cycles or Infinite -360.0° ~ +360.0° (0.1° resolution) 1 μ s ~ 500 s External Trigger (pulse waveforms can only be used in gate mode) Single, External or Internal Rate N-Cycle, Infinite : 0 μ s ~ 100s (1us resolution)		
	Type Amplitude Range Impedance	AM, FM, PWM $\pm$ 5V full scale 10k Ω DC ~ 20 kHz	—	Yes —
EXTERNAL TRIGGER INPUT	Type Input Level Slope Pulse Width Input rate Input Impedance Latency Jitter	AM, FM, PM, PWM, SUM, Sweep $\geq$ 1Vpp > 10k Ω typical For FSK, Burst, Sweep, N Cycle ARB TTL Compatibility Rising or Falling (Selectable) > 100 ns DC ~ 1 MHz 10k Ω , DC coupled Sweep : < 10 μ s (typical); Burst : < 100 ns (typical) Sweep : 2.5 μ s ; Burst : 1 ns , except pulse, 300 ps		
	Output Voltage Output Impedance Output Frequency	1 Vp-p / 50 Ω square wave 50 Ω , AC coupled 10MHz		
10MHz REFERENCE OUTPUT	Input Voltage Input Impedance Input Frequency Waveform Ground Isolation	0.5Vpp ~ 5Vpp 1k Ω , unbalanced , AC coupled 10MHz $\pm$ 10Hz Sine or Square (50 $\pm$ 5% duty) 42Vpk max.		
	10MHz REFERENCE INPUT			
EXTERNAL-SYNC	Phase Delay (max.)	Series Connection : 39+(N-2) x 39 $\pm$ 25nS; Parallel connection : (N-1) x 6 $\pm$ 25nS (where N=number of connected units) Series Connection : 4 ; Parallel Connection : 6		
	Maximum Number of Connected Units Applicable Functions Store/Recall Interface Display	Sine, Square, Triangle, Pulse, Ramp, Harmonic, MOD, Sweep, Burst 10 Groups of Setting Memories GPIB(Optional), LAN, USB 4.3 inch TFT LCD, 480 x 3 (RGB) x 272		
GENERAL SPECIFICATIONS	Power Source Power Consumption Operating Environment	AC100 ~ 240V , 50 ~ 60Hz 50VA 85VA 50VA 85VA Temperature to satisfy the specification : 18 ~ 28°C; Operating temperature : 0 ~ 40°C; Relative Humidity : $\leq$ 80%, 0 ~ 40°C ; $\leq$ 70%, 35 ~ 40°C ; Installation category : CAT II		
	Operating Altitude Pollution Degree Storage Temperature Dimensions & Weight	2000 meters IEC 61010 Degree 2, Indoor Use -10 ~ 70°C, Humidity: $\leq$ 70% 265 (W) x 107 (H) x 374 (D)mm, Approx. 4kg		

The specifications apply when the function generator is powered on for at least 30 minutes under +20°C~+30°C.

Specifications subject to change without notice. FG-303132GD1BH

- Note : 1. A total of ten waveforms can be stored (Every waveform can composed of 8M points maximum)
2. Add 1/10 th of output amplitude and offset specification per °C for operation outside of 0°C~28°C range (1-year specification)
3. Edge time decreased at higher frequency
4. Sine and square waveforms above 25 MHz are allowed only with an "Infinite" count
5. Harmonic distortion and Spurious noise at low amplitudes is limited by a -70 dBm floor

ORDERING INFORMATION	
AFG-3031	30MHz Single channel Arbitrary Function Generator
AFG-3032	30MHz Dual channel Arbitrary Function Generator
AFG-3021	20MHz Single channel Arbitrary Function Generator
AFG-3022	20MHz Dual channel Arbitrary Function Generator
ACCESSORIES	
Quick Start Guide *1, CD-ROM with AFG software and user manual x 1	
GTL-110	BNC Cable, BNC(P/M)-BNC(P/M), 1000mm x 1 (only AFG-3031/3021)
GTL-110	BNC Cable, BNC(P/M)-BNC(P/M), 1000mm x 2 (only AFG-3032/AFG-3022)

OPTIONAL	
Opt.01	GPIB Interface
GRA-432	Rack Adapter Panel
OPTIONAL ASSESSORIES	
GTL-246	USB Type A to Type B cable
FREE DOWNLOAD	
PC Software	Arbitrary Waveform Editing Software

Global Headquarters
GOOD WILL INSTRUMENT CO., LTD.
T +886-2-2268-0389 F +886-2-2268-0639

China Subsidiary
GOOD WILL INSTRUMENT (SUZHOU) CO., LTD.
T +86-512-6661-7177 F +86-512-6661-7277

Malaysia Subsidiary
GOOD WILL INSTRUMENT (M) SDN. BHD.
T +604-6111122 F +604-6115225

Europe Subsidiary
GOOD WILL INSTRUMENT EURO B.V.
T +31 (0)40-2557790 F +31 (0)40-2541194

U.S.A. Subsidiary
INSTEK AMERICA CORP.
T +1-909-399-3535 F +1-909-399-0819

Japan Subsidiary
TEXIO TECHNOLOGY CORPORATION.
T +81-45-620-2305 F +81-45-534-7181

Korea Subsidiary
GOOD WILL INSTRUMENT KOREA CO., LTD.
T +82-2-3439-2205 F +82-2-3439-2207

GW INSTEK
Simply Reliable



www.gwinstek.com

www.facebook.com/GWInstek